




## CONTOUR LINE – 60 CIRCULAR DI PENDANT

A direct/indirect circular pendant luminaire with remote driver

# CONTOUR LINE – 60 CIRCULAR DI PENDANT

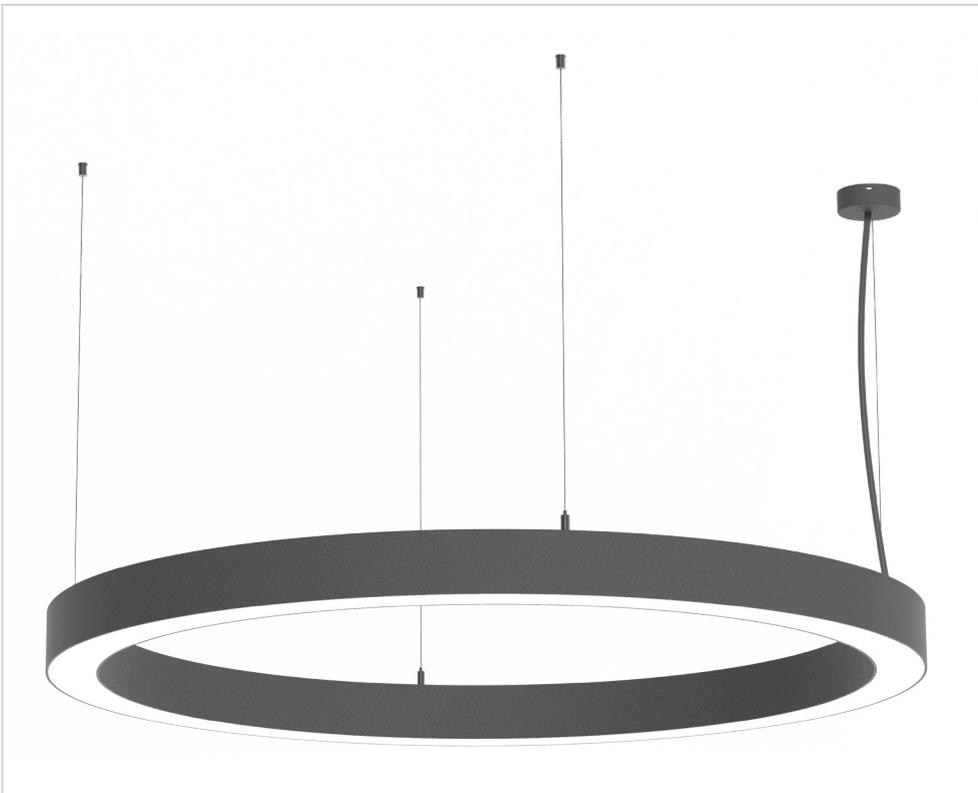

Versatile direct/indirect circular pendant for seamless integration – designed for suspended mounting, this elegant luminaire blends effortlessly into any space with its smooth, contoured design. Featuring high-performance LEDs (3 MacAdam steps) and a remote driver with adjustable current selection, it delivers up to 90lm/W (CRI80) with a long lifespan of 75,000 hours (L90 B10). The PolyLED diffuser ensures uniform, spot-free illumination. Backed by a minimum 7-year warranty for lasting performance and peace of mind.



## Base System:

High grade aluminium extrusion

## Light Engine:


Custom board with LED package, quality European drivers as standard

## Optics:

High performance PolyLED diffuser with no visible spotting and uniform appearance

## Mounting Options:

Wire Suspended, Rod Suspended

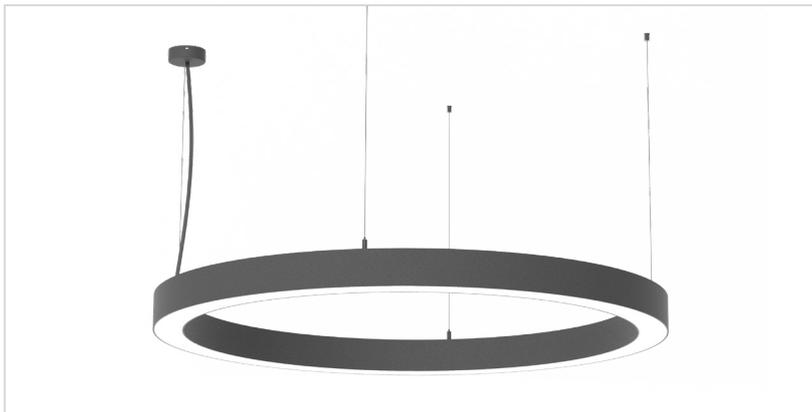

### KEY ADVANTAGES

- Multiple diameters and finishes available
- High grade aluminium extrusion
- SELV LED Engine
- High performance PolyLED (PC) with no visible spotting and uniform appearance
- Direct and Indirect light distribution

#### GENERAL INFORMATION

Installation type	Wire Suspended, Rod Suspended
RCM Mark	Yes
Certifications	AS/NZS/IEC 60598, ROHS

#### HOUSING AND FINISH

Housing	High grade aluminium profile Finish: Natural Anodised or Powder Coated
Gear tray	High grade extruded aluminium profile
Light distribution	Direct/Indirect
Optics/Diffuser	PolyLED (PC)
Tightness level	IP20

#### PERFORMANCE

Lumen output	5130-15255 lm
Efficacy (lm/W) up to	90

#### OPERATING CONDITIONS

Operating temperature range (Ta)	0°C up to +40°C (Dependant on application)
----------------------------------	---

#### ELECTRICAL INFORMATION

Electrical class	Class I / Class II (available on request)
Nominal voltage	198-264V – 50Hz
Power factor (at full load)	> 95%
Surge protection (kV)	Mains surge capability (between L/N – PE) 2kV Optional 10kV with stand-alone SPD
LED Engine	SELV
Control protocol(s)	Fixed Output, DALI, 1-10V, Switch Dim/ Touch Dim/ Push Dim/ Casambi
Control options	Based on application and design architecture

#### OPTICAL INFORMATION


LED colour temperature	Standard: 3000K, 4000K Optional: 2700K, 5000K, 6500K, Tuneable white 2700K-6500K, RGBW
Colour rendering index (CRI)	>80 Optional: >90
Standard Deviation Colour Matching (SDCM)	3 MacAdam Steps

#### RATED LUMEN MAINTENANCE

L90 B10 = 75000 hours

DIMENSIONS AND MOUNTING

Product	Part number (non-dim)	Part number (DALI)	Dimensions	Canopy Dia.	Power Cable	Suspension Points
Contour Line DI 600	60CONTOURDI600	60CONTOURDI60DA	D660xW60xH68	280	1	4
Contour Line DI 900	60CONTOURDI900	60CONTOURDI90DA	D900xW60xH68	280	2	4
Contour Line DI 1200	60CONTOURDI1200	60CONTOURDI12DA	D1200xW60xH68	280	2	4
Contour Line DI 1500	60CONTOURDI1500	60CONTOURDI15DA	D1500xW60xH68	350	2	4
Contour Line DI 1800	60CONTOURDI1800	60CONTOURDI18DA	D1830xW60xH68	350	2	4

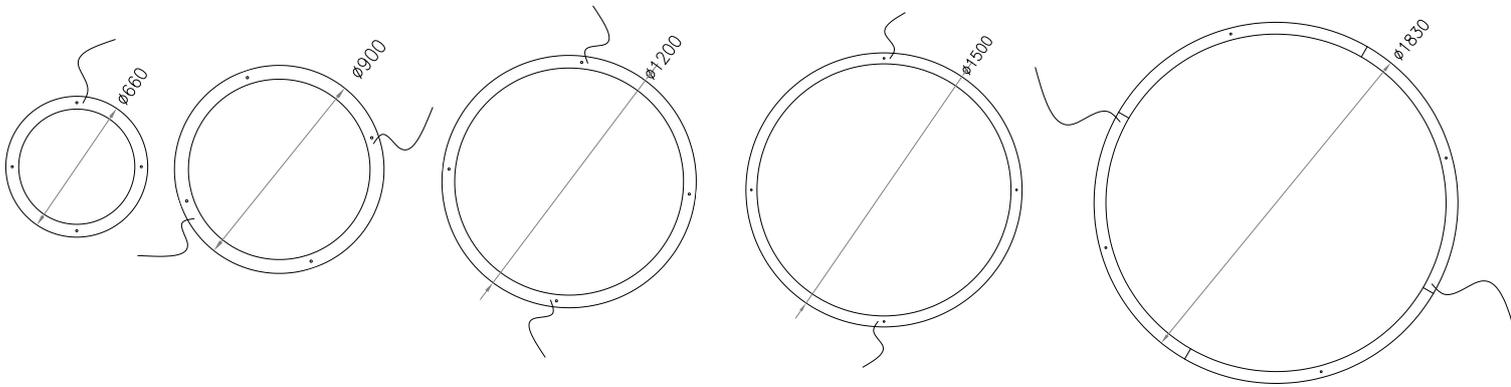

PERFORMANCE

Product	Lumen output (lm)	System Power (W)	Efficacy (lm/W)
Contour Line DI 600	3420/1710	57	90
Contour Line DI 900	4950/2475	83	90
Contour Line DI 1200	6750/3375	112	90
Contour Line DI 1500	8460/4230	141	90
Contour Line DI 1800	10170/5085	169	90

Note: The above output values are 'delivered' lumens. This takes into consideration the optical efficacy of the luminaire. Above values are based on 4000K colour temperature and 25° C ambient temperature.

TO SPECIFY

Versatile direct/indirect circular pendant for seamless integration – designed for suspended mounting, this elegant luminaire blends effortlessly into any space with its smooth, contoured design. Featuring high-performance LEDs (3 MacAdam steps) and a remote driver with adjustable current selection, it delivers up to 90lm/W (CRI80) with a long lifespan of 75,000 hours (L90 B10). The PolyLED diffuser ensures uniform, spot-free illumination. Backed by a minimum 7-year warranty for lasting performance and peace of mind.